


OUTSIDE TOP _____ F
 OUTSIDE BOTTOM _____ H

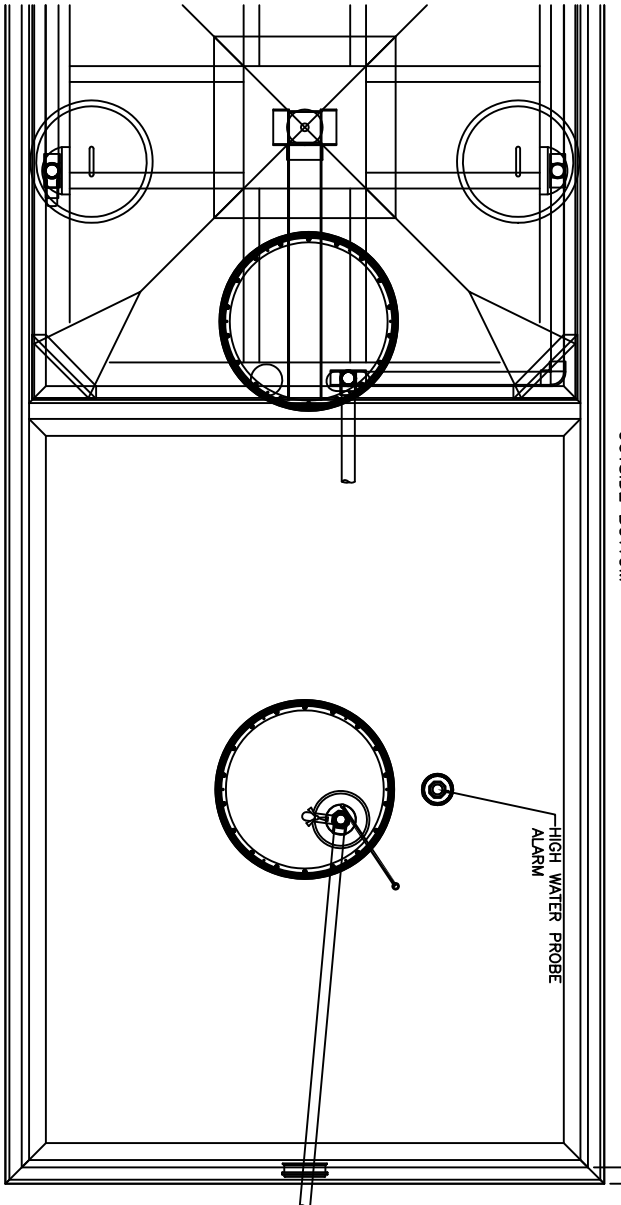


PLAN VIEW

REVISIONS	DESCRIPTION	DATE

DIMENSIONS	
A	72.00"
B	62.00"
C	57.00"
D	3.00"
E	83.50"
F	179.00"
G	78.50"
H	174.00"
J	89.50"
K	15.00"
L	23.50"
M	16.50"


THE HOOT AEROBIC TREATMENT SYSTEM

- 1) SEPARATE PRETREATMENT TANK REQUIRED (MIN. 600 GALLONS) - WHERE ANAEROBIC DIGESTION OCCURS AND STORAGE FOR NON-BIODEGRADABLE MATERIALS.
- 2) AERATION CHAMBER- WHERE AIR IS INTRODUCED INTO SEWAGE FOR DIGESTION.
- 3) CLARIFIER- A STILL CHAMBER WHERE SOLIDS SETTLE OUT AND THE CLEAR EFFLUENT RISES.
- 4) TROY AIR LINEAR AIR BLOWER- LONG LIFE, EFFICIENT LINEAR BLOWER WHICH COMPRESSED ATMOSPHERIC AIR AND UNDER PRESSURE DELIVERS IT TO THE TANK.
- 5) AIR MANIFOLD- DELIVERS THE AIR FROM THE LINE TO THE STONES FOR DIFFUSION INTO THE SEWAGE.
- 6) AERATION LINE- DELIVERS THE AIR FROM THE PUMP TO THE MANIFOLD. CHECK VALVE INCLUDED.
- 7) AERATION STONE- AIR IS FINELY DIFFUSED FROM THE STONE INTO THE AERATION CHAMBER.
- 8) 15" COVERS- PROVIDE ASSEMBLY PORT ACCESS INSIDE OF THE SYSTEM. (NOT REQUIRED FOR REGULAR SERVICE)

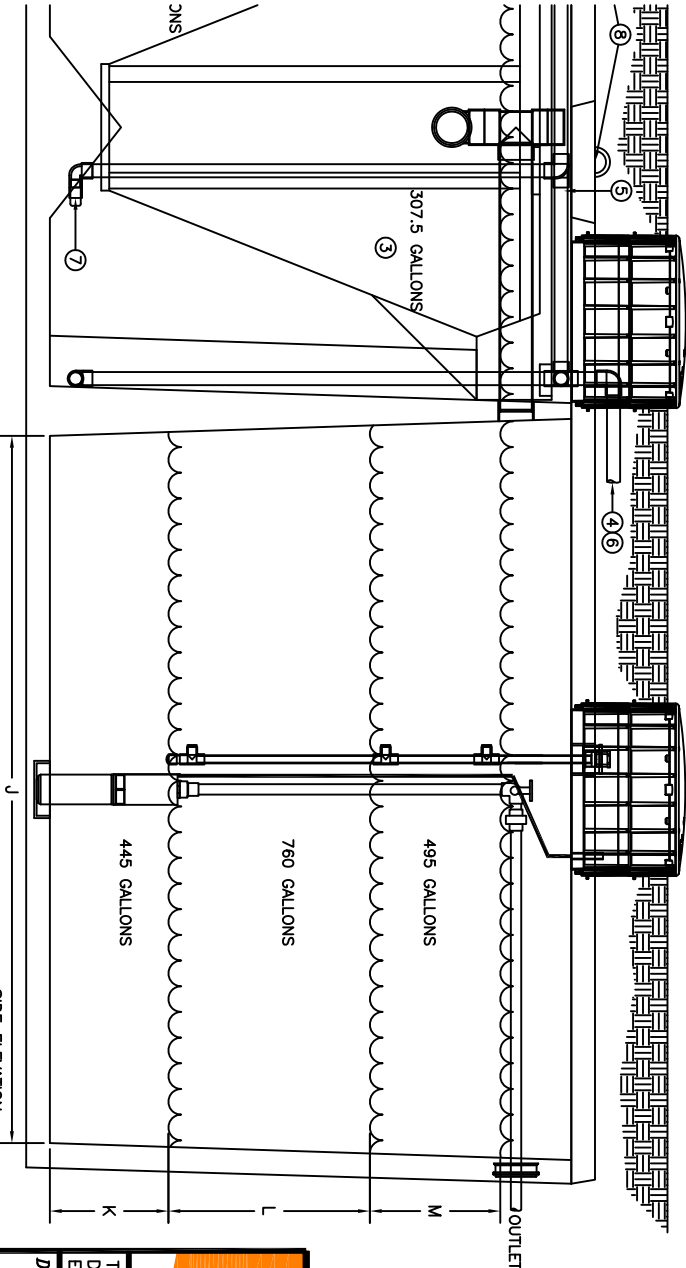

SIDE ELEVATION

PLEASE NOTE: SYSTEM NEEDS A MINIMUM 600 GALLON PRE-TREATMENT TANK TO BE A COMPLETE SYSTEM



HOOT SYSTEMS, LLC
www.hootsystems.com

Made in North York, Pa.

THIS DRAWING IS THE PROPRIETARY PROPERTY OF HOOT SYSTEMS LLC. REPRODUCTION, DISCLOSURE OR USE OF ANY PART OF THIS DRAWING OR ANY INFORMATION THEREIN IS EXPRESSLY PROHIBITED WITHOUT PRIOR WRITTEN CONSENT OF HOOT SYSTEMS LLC.

DESCRIPTION: 750 GPD SYSTEM W/1750 PUMP TANK
 H-750 AN POLYLOK ACCESS

DATE: 07-24-08 **DRAWN BY:** AY **CHECK BY:** RS **SCALE:** N.T.S.

PART #
H-750-AN